AD-A128 331   DEVELOPMENT OF THE MICROSAS LONGITUDINAL FLIGHT CONTROL   1/1
              SYSTEM FOR THE AU..(U) NATIONAL AERONAUTICAL
              ESTABLISHMENT OTTAWA (ONTARIO)   S KERELIUK ET AL.

UNCLASSIFIED   FEB 83 NAE-AN-5 NRC-21066   F/G 1/3   NL

END
DATE
FILMED

DTIC

	1.0		4.5	2.8	2.5
			5.0	3.2	2.2
			5.6	3.6	
	1.1		9.3	4.0	2.0
					1.8
	1.25	1.4			1.6

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD A128331

DTIC
SELECTED
MAY 19 1983
D

83   05 18 043

- 8 -

NATIONAL AERONAUTICAL ESTABLISHMENT

SCIENTIFIC AND TECHNICAL PUBLICATIONS

AERONAUTICAL REPORTS:

Aeronautical Reports (LR): Scientific and technical information pertaining to aeronautics considered important, complete, and a lasting contribution to existing knowledge.

Mechanical Engineering Reports (MS): Scientific and technical information pertaining to investigations outside aeronautics considered important, complete, and a lasting contribution to existing knowledge.

AERONAUTICAL NOTES (AN): Information less broad in scope but nevertheless of importance as a contribution to existing knowledge.

LABORATORY TECHNICAL REPORTS (LTR): Information receiving limited distribution because of preliminary data, security classification, proprietary, or other reasons.

Details on the availability of these publications may be obtained from:

Publications Section,
National Research Council Canada,
National Aeronautical Establishment,
Bldg. M-16, Room 204,
Montreal Road,
Ottawa, Ontario
K1A 0R6

ÉTABLISSEMENT AÉRONAUTIQUE NATIONAL

PUBLICATIONS SCIENTIFIQUES ET TECHNIQUES

RAPPORTS D'AÉRONAUTIQUE

Rapports d'aéronautique (LR): Informations scientifiques et techniques touchant l'aéronautique jugées importantes, complètes et durables en termes de contribution aux connaissances actuelles.

Rapports de génie mécanique (MS). Informations scientifiques et techniques sur la recherche externe à l'aéronautique jugées importantes, complètes et durables en termes de contribution aux connaissances actuelles.

CAHIERS D'AÉRONAUTIQUE (AN): Informations de moindre portée mais importantes en termes d'accroissement des connaissances.

RAPPORTS TECHNIQUES DE LABORATOIRE (LTR): Informations peu disséminées pour des raisons d'usage secret, de droit de propriété ou autres ou parce qu'elles constituent des données préliminaires.

Les publications ci-dessus peuvent être obtenues à l'adresse suivante:

Section des publications
Conseil national de recherches Canada
Établissement aéronautique national
Im. M-16, pièce 204
Chemin de Montréal
Ottawa (Ontario)
K1A 0R6

The National Aeronautical Establishment is pleased to announce the initiation of a new series of publications, the NAE Aeronautical Notes. The "Aeronautical Notes" series has been developed to complement the existing NAE Aeronautical Report Series. Although more limited in scope than the NAE Aeronautical Reports, the Aeronautical Notes will contain scientific and technical information pertinent to both aeronautics and applied aeronautics which is considered to be a contribution to existing knowledge and worthy of widespread dissemination.

I hope that you will find the reports informative and useful.

Yours faithfully,

L'Établissement aéronautique national (ÉAN) est heureux d'annoncer la publication d'une nouvelle série intitulée "Cahiers de l'aéronautique". Ces derniers compléteront les rapports d'aeronautique que publie déjà l'ÉAN. Quoique de champ plus restreint que les rapports, les notes fourniront des données techniques d'aéronautique fondamentale et appliquée propres à une grande diffusion et susceptibles de contribuer à l'avancement des connaissances.

Dans l'espoir que vous trouverez les notes intéressantes, je vous prie d'agréer, l'expression de mes sentiments les meilleurs.

G.M. Lindberg

Director/Directeur

Canada

UNLIMITED
UNCLASSIFIED

DEVELOPMENT OF THE MICROSAS LONGITUDINAL FLIGHT CONTROL SYSTEM FOR THE AUGMENTOR WING AIRCRAFT

MISE AU POINT DU SYSTÈME DE CONTRÔLE EN TANGAGE MICROSAS POUR L'AVION À AILE À VOLETS TROMPES

by/par

S. Kereliuk, K. Lum, W.E.B. Roderick

National Aeronautical Establishment

AERONAUTICAL NOTE
NAE-AN-5
NRC NO. 21066

OTTAWA
FEBRUARY 1983

S.R.M. Sinclair, Head/Chef
Flight Research Laboratory/
Laboratoire des recherches en vol

G.M. Lindberg
Director/Directeur

SUMMARY

A digital longitudinal stability augmentation system was designed and installed in the Augmentor Wing Research Aircraft by the Flight Research Laboratory of the National Aeronautical Establishment. This system partially replaced the computer-controlled control and display system called STOLAND owned by NASA Ames Research Center that was removed from the aircraft prior to its return to Canada. The computer system is described and the software flow charts are illustrated. Brief comments on the performance of the system during the flight test program are included.

RÉSUMÉ

Le Laboratoire de recherche en vol de l'Établissement aéronautique national a mis au point et installé sur l'avion à aile à volets trompes un système numérique d'augmentation de la stabilité longitudinale. Il remplace partiellement le système de contrôle et de visualisation informatisé STOLAND de l'Ames Research Center de la NASA qui avait été démonté avant que l'avion ne revienne au Canada. On décrit le système informatisé, illustrant cette description de figures représentant les organigrammes du logiciel. On fait également quelques brefs commentaires sur le comportement du système au cours du programme de vols d'essais.

CONTENTS

ILLUSTRATIONS

ILLUSTRATIONS (Cont'd)

APPENDIX

1.0 INTRODUCTION

The Augmentor Wing Research Aircraft (Fig. 1) is a product of Canadian technology and joint Canadian and American funding*. It successfully fulfilled a role as a proof of concept vehicle for the de Havilland Augmentor Wing STOL concept and has been a productive research tool for the U.S. and Canada during the last decade. It proved to be rugged, reliable and a relatively flexible tool for more general studies of the STOL operational environment and STOL certification requirements. These activities were carried out under the auspices of the NASA Ames Research Center, Moffet Field, California, with on site participation by a member of the NAE Scientific Staff during the major portion of this research period (Ref. 1).

With redundant longitudinal controls, and a control and display package called STOLAND, this vehicle was used in a series of advanced control/display programs addressing both the operational problems and operational benefits of lowspeed terminal area flight, varying dynamic characteristics, curved steep decelerating approaches, and autoland.

2.0 ADVANCED STOL TRANSPORT

Coincidental with the termination of this joint program in 1980 the Canadian Government committed funds to enable de Havilland of Canada to execute a "Definition Phase of an Advanced STOL Transport". As part of the Canadian Government program, funds were established to return the Augmentor Wing Research Aircraft to Canada for a final flight test phase. NAE took over operational control of the aircraft and it was ferried to Ottawa in September 1981.

3.0 NAE ROLE

The central, computer-controlled control and display system called STOLAND was owned by NASA Ames Research Center and

---

* Canadian Department of Industry, Trade and Commerce
  and the American National Aeronautical and Space Administration.

committed to further research in that establishment. It was
removed from the aircraft with only sufficient avionics
retained to allow ferrying the aircraft. In order to undertake
useful work related to the Canadian program, it was necessary
to re-equip the aircraft with a replacement system preserving
some of the capability to improve aircraft control characteristics
and to allow experimental investigations involving minor con-
figuration changes. The program agreement assigned the responsi-
bilities for the design, implementation and testing of a
longitudinal digital flight control system to the Flight Research
Laboratory.

The aircraft was maintained and operated at Uplands by
the FRL of NAE from September 1981 until it was handed over to
de Havilland in September 1982. During that period of time
qualified FRL maintenance engineers carried out an engine and
airframe inspection. De Havilland personnel assisted in this
work to obtain the experience necessary to assume full responsi-
bility for maintenance on hand over. The control laws were
selected and the mechanical installation of the computer system
was carried out during the airframe inspection and the programs
were written and run on the ground.

This was followed by a flight test program of twenty
flights during which gains and coefficients were adjusted and
tuned.

The following is a more detailed description of the
system installed by NAE.

4.0   THE MICROSAS COMPUTER SYSTEM

4.1   System Hardware

The MICROSAS Computer System (Fig. 2) was designed at
the Flight Research Laboratory to meet the following require-
ments:

> • to be a digital flight controller system for the
> pitch and speed SAS;

- to be a data acquisition system for the real-
  time on-board calculations and post-flight
  data analysis;

- to be a convenient ground-based computer
  facility for transducer calibrations, diagnostics,
  and ground check-outs.

Shown schematically in Figure 3, the 16-bit micro-
processor, with 16K of core memory and 4K of EPROM/RAM memory
is driven by a 32-Hz system clock for each computational cycle.
Concurrent with the main task, the computer, on interrupts
generated by the synchronous 800-Hz timer, performs the high
speed digital filtering.

Transducer signals which are conditioned and sampled by
the A/D converter are stored in the rotating data buffers before
being output to the magtape recorder. Updated command signals to
the flight controller are fed to the D/A interface to drive the
servos through the SIU (Servo Interlock Unit) which among other
functions, supervises the servo engagement and disengagement logic.
Both airspeed and nozzle references are selected by thumbwheel
switches in the center console. Critical system operational status
is monitored and displayed to the pilot.

Although the MICROSAS is not designed to be interactive,
the operator can make changes to the flight program such as gain
optimization during the initial phases of flight testing by
means of a small hand-held terminal. Stored in EPROM, the flight
program is automatically loaded into core memory for execution
on start-up. With the addition of a floppy disk, the computer
system is often used for ground calibrations and system check-outs.

The flight system controller is fail-passive, with
several levels of error checking and failure monitoring of both
the hardware and software. The servo is automatically disengaged
should a critical fault occur in the SAS.

4.2 Software Implementation

The MICROSAS software design requirements are based on simplicity and reliability. An attempt is therefore made to develop a small, modular stand-alone software package for the implementation of the real-time digital flight controller.

Written in Macro Assembler Language, the system application program is divided into a series of major tasks, some of which are executed as calls to subroutines (Figs. 4 through 9). Software limiting and error checking are extensively utilized throughout the flight program to enhance software integrity.

5.0 AIRCRAFT SYSTEMS

5.1 Description of Aircraft

The Augmentor Jet STOL Research Aircraft (AWJSRA) is a de Havilland of Canada DHC-5/C-8A Buffalo airframe modified with an augmentor flap system. The integrated propulsive-lift system incorporates two Rolls Royce Spey 801 split-flow turbofan engines providing cold fan flow to internally blow the augmentor flap for powered lift.

With the augmentor flap (Fig. 10) a small mass of high energy air is directed over the leading ledge of the lower flap, the so called Coanda surface. This high energy air entrains a larger flow of ambient air between the upper and lower flap resulting in a larger mass flow of lower velocity. This means higher momentum or thrust from the flow and a lower velocity or a lower specific energy in the flow, resulting in higher efficiency and lower losses.

The addition of movable surfaces on the lower flap, the chokes, allows direct and immediate control of the augmented lift. This can be used for powered roll control or for direct lift control. The flow for the augmentor flaps is bled from the engine compressors.

The residual hot thrust (approximately 60%) can be independently vectored over a range of 98° by means of two conical nozzles, thereby providing generous (and immediate) steep descent or go-around capability over a range of about 12° of flight path angle. The cold thrust is cross-ducted in appropriate amounts so that minimum asymmetric lift results in the event of engine failure.

5.2 System Operation

The combination of the augmented lift due to the de Havilland designed blown flap system and the vectored thrust from the nozzles gives the Augmentor Wing Research Aircraft its limited five degrees of freedom variable stability capability. This ability to independently control vertical and longitudinal accelerations along with the conventional three degrees of freedom in pitch, roll and yaw, gives the aircraft its unique capability for the evaluation of STOL procedures, control techniques and instrument displays.

In order to appreciate another unique capability of the Augmentor Wing Research Aircraft the concept of front-side and back-side operation must be understood. As an aircraft is decelerated the power required for level flight decreases until the minimum power speed is reached. A further reduction in speed below minimum power speed will result in increased drag and increasing power requirements to maintain level flight. Operation below the minimum power speed is normally characterised by a requirement to control flight path with engine power and airspeed with pitch attitude, increased power with reduced speed called the "back-sided" control technique. Figure 11 is a plot of flight path angle vs airspeed at a fixed nozzle and flap configuration, with variations in pitch attitude and engine power. Deficiencies in handling qualities of power-lift STOL aircraft in the approach and landing phase have been exposed during flight tests and ground-based simulations, and have been well documented (Ref. 2, 3 and 4). Characteristics associated with "back-sided" low speed flight, high wing loading and substantial thrust turning have

resulted in deficiencies in longitudinal stability and control
in the form of sluggish control response and highly coupled
response characteristics. Furthermore, the introduction of
additional controllers into the cockpit, though allowing a
much greater flexibility in path performance, tends to increase
pilot work load substantially.

6.0 CONTROL LAWS

The control laws implemented by the Flight Research
Laboratory have been selected from the wide range of systems
used in the earlier Augmentor Wing research programs (Refs. 3,
4, 5 and 6). The criterion for this selection was the effective-
ness of providing work load relief for the pilot.

6.1 Pitch SAS

A block program of the pitch SAS is shown in Figure 12.
This system is a form of rate-command-attitude hold, with stick
force providing the command signal. Use of pitch attitude feed-
back permits attitude stabilization, a function necessary to
reduce the effects of the coupled response characteristics of the
aircraft. Pitch-rate feedback provides good closed-loop stability.
Gain-scheduling is applied to the resultant command signal as an
inverse function of airspeed.

6.2 Airspeed Stabilization

The nozzle control system is presented as a block
diagram in Figure 13. Airspeed stabilization is accomplished
by driving the nozzles with a speed error signal. An airspeed
complimentary filter arrangement combines calibrated airspeed
and longitudinal acceleration through a second-order filter
which maintains the high-frequency velocity component prevalent
in aircraft manoeuvring but removes gust components above about
0.25 rad/sec. A V_{ref} selection on a thumbwheel on the SAS panel
provides a reference for the speed error signal. Ramping the
speed error signal gain over a 4 second time period limits nozzle
excursions on initial engagement when large speed errors are

present. Integral plus proportional paths of the speed error signal comprise a closed-loop system ensuring that the steady state value of the output signal washes out. A quickened response to speed errors is provided by a washed-out pitch attitude signal driving the nozzles. In the short term, this tends to decouple speed excursions due to pitch attitude changes. A nominal position of nozzle angle on approach is selected with the nozzle control levers before engagement. This allows a reference position for nozzle modulation, although the low frequency trim nozzle angle will subsequently vary to maintain the reference speed due to the integral path discussed above. Symmetrical nozzle motion is insured by comparing left and right nozzle positions. Nozzle angle differentials greater than 25° will cause the nozzle servo to disengage. A filtered nozzle position signal is provided by combining averaged position of left and right nozzle with integrated nozzle servo rate. This avoids non-linearities in the electrical servo control loop caused by hysterises in the pneumatic motor drive mechanism, and allows the pilot to manually over-ride the electrical nozzle servo through a clutch mechanism.

6.3 Choke Loop

A block diagram of the choke control system is presented in Figure 14. Washed-out pitch attitude to chokes provides augmented heave damping which serves to quicken flight path control with pitch attitude. Likewise, washed-out throttle deflection to chokes provides a quickening of the flight path control with throttle. Lift losses due to large nozzle aft rotations are partially offset by driving the chokes open, from a normal trim bias setting of 35% closed, with a nozzle position signal at a ratio of 0.75% choke per degree nozzle. First order smoothing of the raw nozzle position signal is used. A thumb-wheel switch is provided on the SAS panel to enable a reference nozzle position to be selected. Nozzle angles less than that selected would drive the chokes open, with any remaining choke authority available for quickening flight path response to pitch attitude and throttle discussed above.

6.4 Throttle Loop

The software for the throttle loop, shown in block diagram form in Figure 15, was implemented but the system was not test flown by NAE. The intent in using the throttle servo was to further augment aircraft heave damping by providing a pitch attitude to throttle loop which would quicken flight path response to pitch attitude, similar to that obtained through the chokes. A further quickening of this control mode is supplied through pitch rate to throttle. An averaged throttle position provides loop closure around the throttle servo.

7.0 COMMENTS

A total of 20 flight hours were spent optimizing loop gains, troubleshooting faults and demonstrating the system. Out of a total of 57 landings, 18 were performed with some or all of the system loops engaged.

On approach, the combination of pitch attitude stabilization and speed stabilization were effective in reducing pilot work load. The coupled response characteristics of the augmented aircraft were considerably improved and less severe than the unaugmented aircraft. Speed control was automatic, and the pilot could devote most of his attention to flight path control with pitch attitude, with only occasional throttle movements required to maintain the required angle of attack trim point. The more precise, less "contaminated" coupling of pitch attitude to flight path provided a significant improvement in flight path performance and work load.

When flaring from a steep approach, the nozzles tracked aft in an attempt to maintain speed and the chokes opened on command of pitch rate and nozzle deflection. This resulted in a prolonged float before touchdown accompanied by an uncomfortable increase in angle of attack. Coordinating throttle reduction during the flare often resulted in "untidy" landings. Inhibiting the speed stabilization during the flare would allow more comfortable and accurate landings. There was no attempt to

optimize the landing flar. handling and performance during
the NAE program.

The NAE digital SAS as implemented, satisfies the
performance requirements of the final flight test phase. It
successfully replaced STOLAND in pitch and airspeed stabilization,
and heave damping, significantly reducing pilot work load and
simplifying task performance during approach. Although in its
present configuration the system is somewhat less flexible than
STOLAND, minor modifications to the control laws for the flare
would allow enhanced capability in future programs.

8.0   REFERENCES

1.   Hindson, W.S.   A Summary of Joint U.S. - Canadian
     Hardy, G.H.   Augmentor Wing Powered-Lift STOL
     Innis, R.C.   Research Programs at the Ames
                    Research Center, NASA, 1975-1980.
                    Flight Research Laboratory LTR-FR-75,
                    July 1980.

2.   Vomaske, R.F.   A Flight Investigation of the Stability,
     Innis, R.C.   Control and Handling Qualities of an
     Swan, B.E.   Augmented Jet Flap STOL Airplane.
     Grossmith, S.W.   NASA TP 1254, 1978.

3.   Franklin, J.A.   Flight Evaluation of Stabilization
     Innis, R.C.   and Command Augmentation System
     Hardy, G.H.   Concepts and Cockpit Displays During
                      Approach and Landing of a Powered-
                      Lift STOL Aircraft.
                      NASA TP-1551, November 1980.

4.   Franklin, J.A.   Design Criteria for Flight Path and
     Innis, R.C.   Airspeed Control for the Approach
     Hardy, G.H.   and Landing of STOL Aircraft.
     Stephenson, J.D.   NASA TP-1911, March 1982.

5.   Hindson, W.S.   Flight-Test Evaluation of STOL
     Hardy, G.H.   Control and Flight Director Concepts
     Innis, R.C.   in a Powered-Lift Aircraft Flying
                     Curved Decelerating Approaches.
                     Aeronautical Report LR-603, NRC No.
                     19582, March 1981.

6.   Hindson, W.S.   Analysis of Several Glidepath and
                     Speed Control Autopilot Concepts for
                     a Powered-Lift STOL Aircraft.
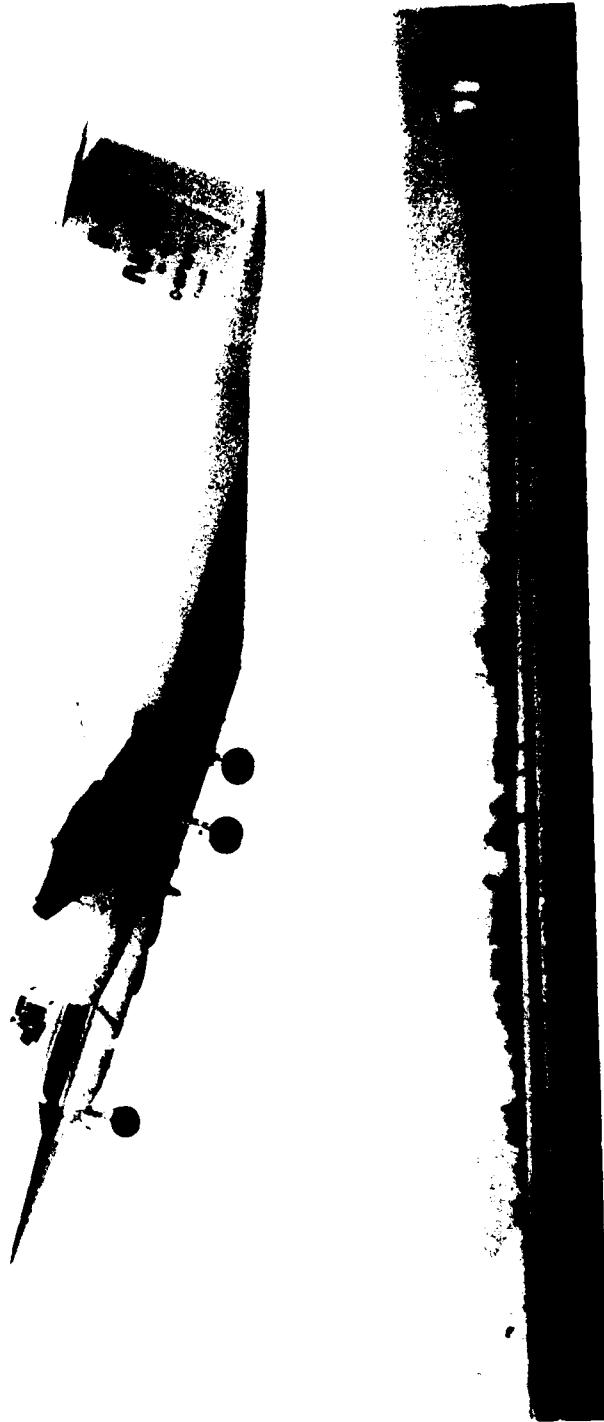   NASA TM-84282, August 1982.
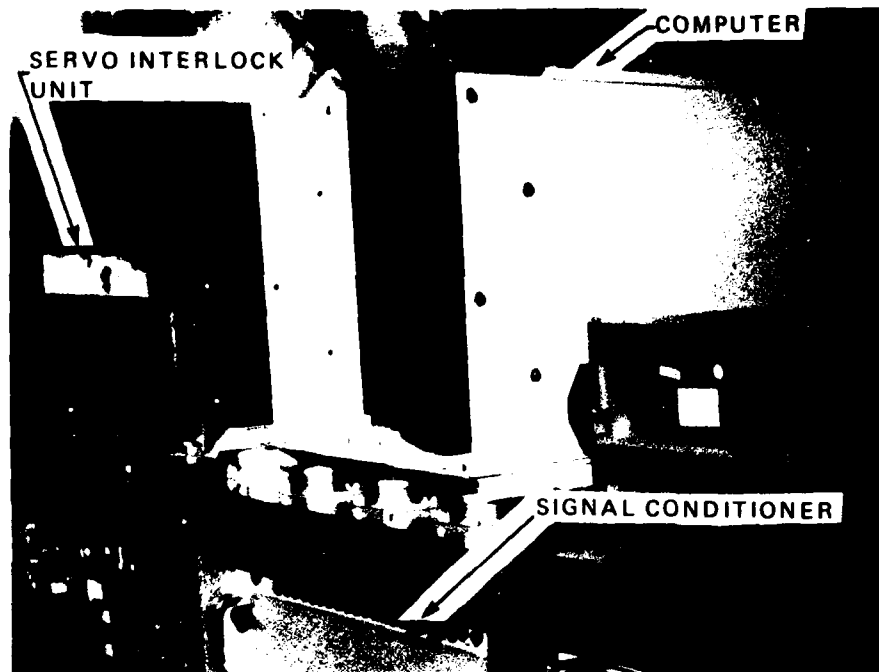
FIG. 1: AUGMENTOR WING RESEARCH AIRCRAFT

FIG. 2: MICROSAS COMPUTER SYSTEM

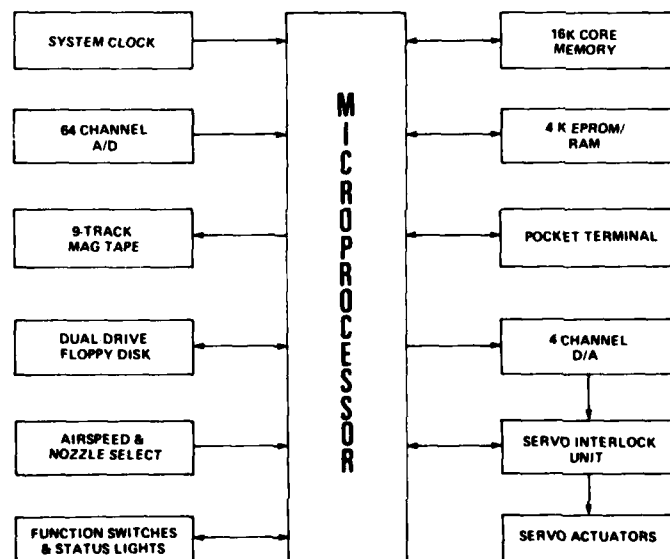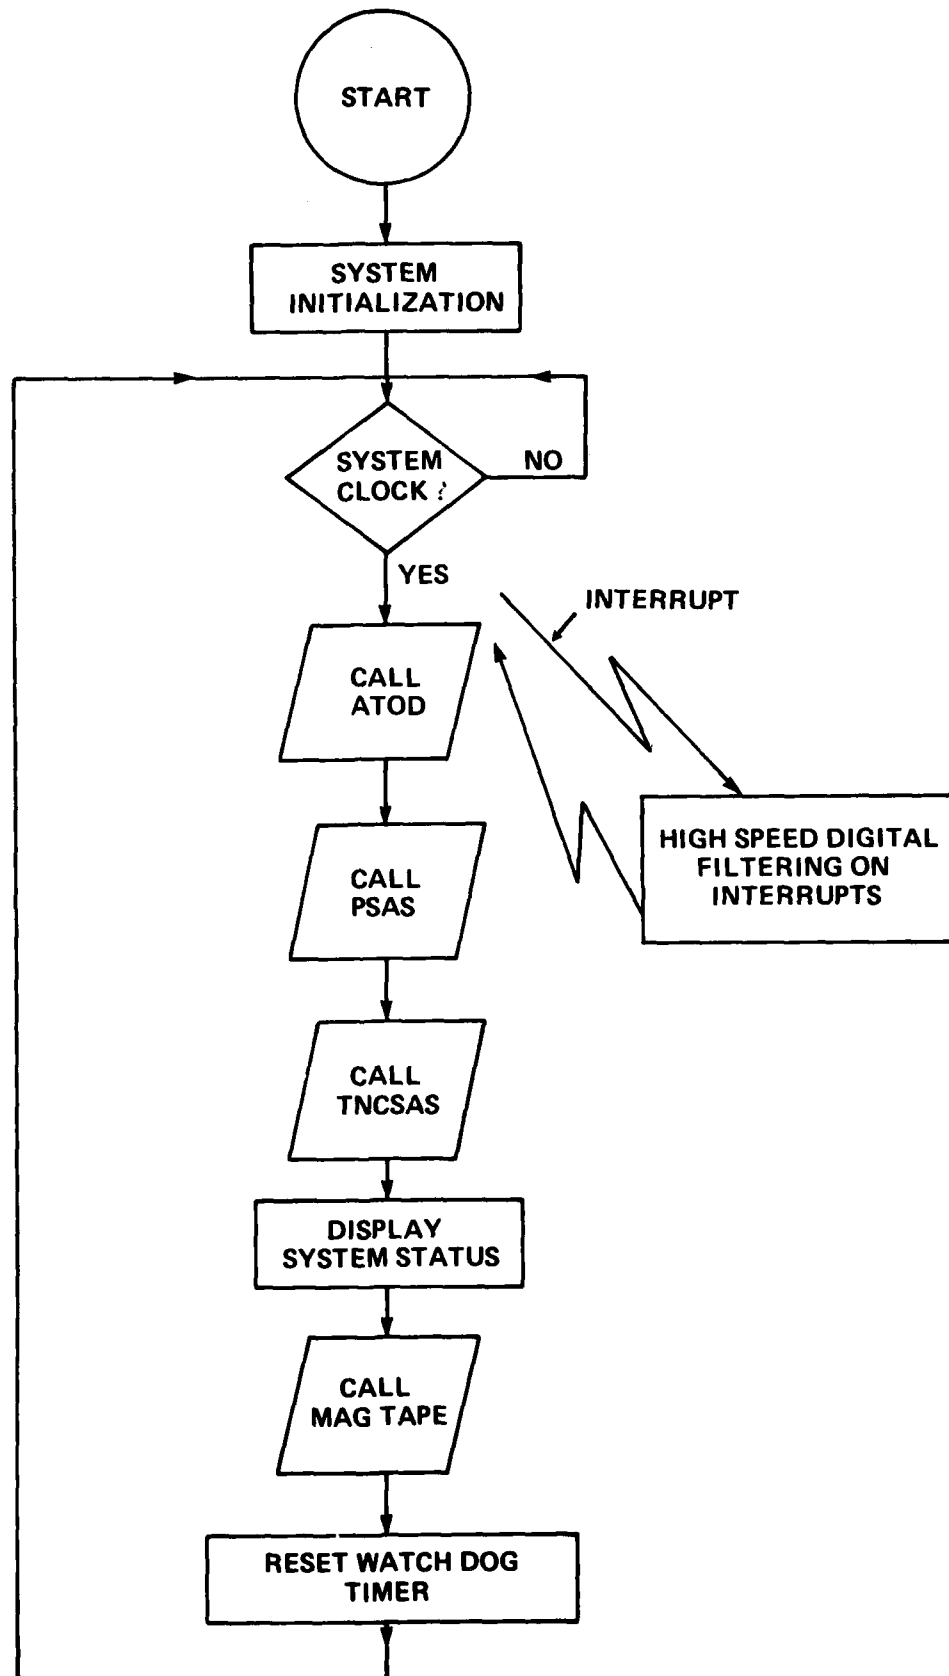**FIG. 3: MICROSAS BLOCK DIAGRAM**
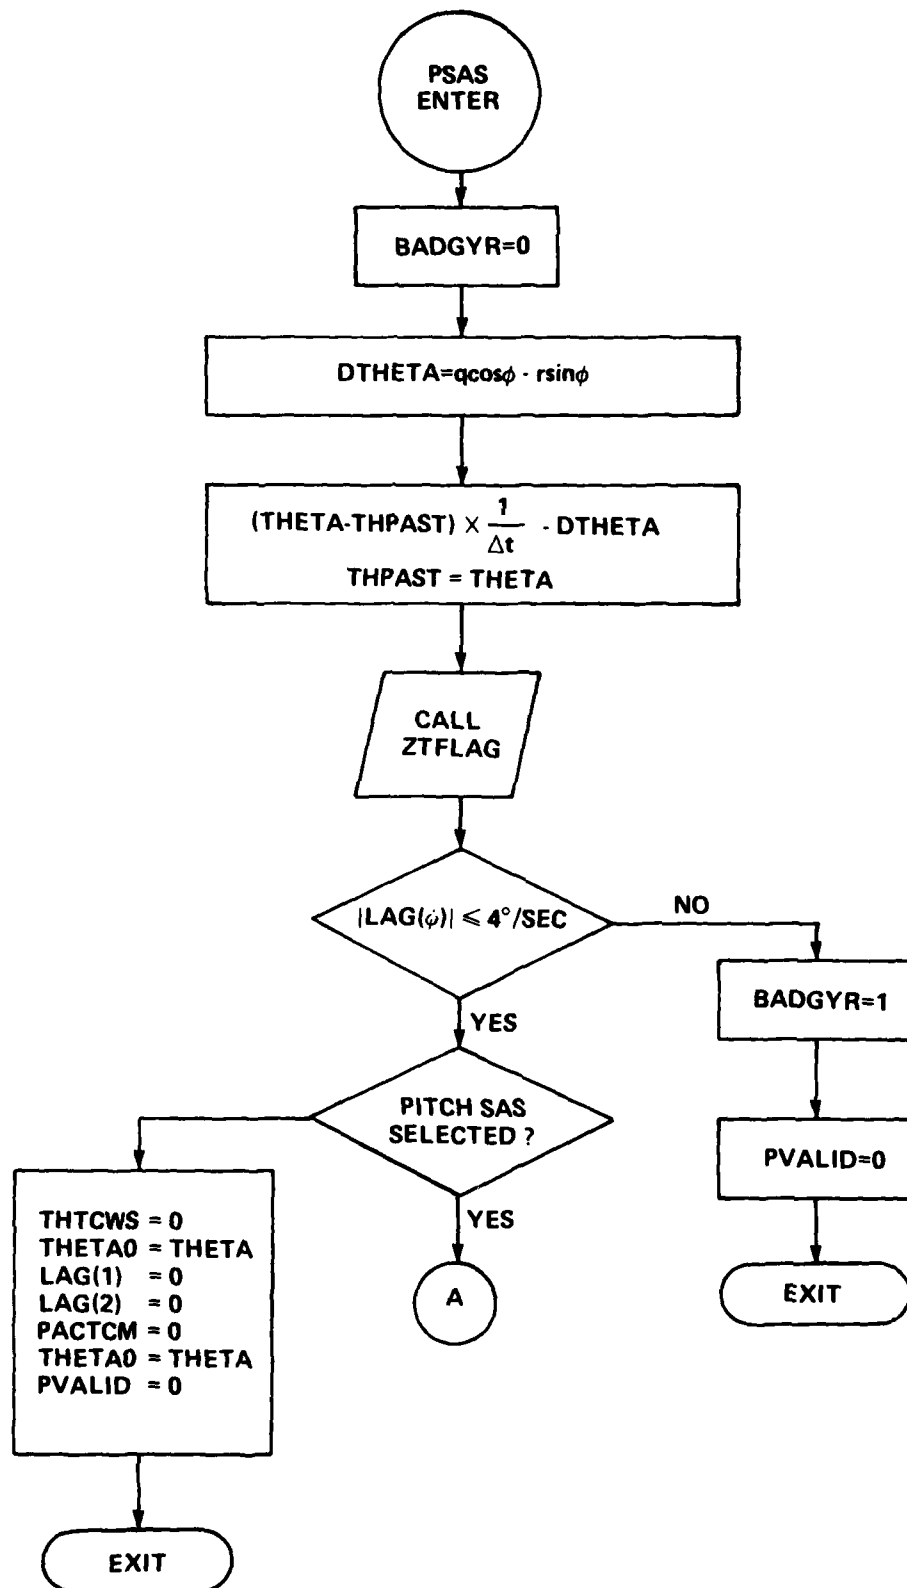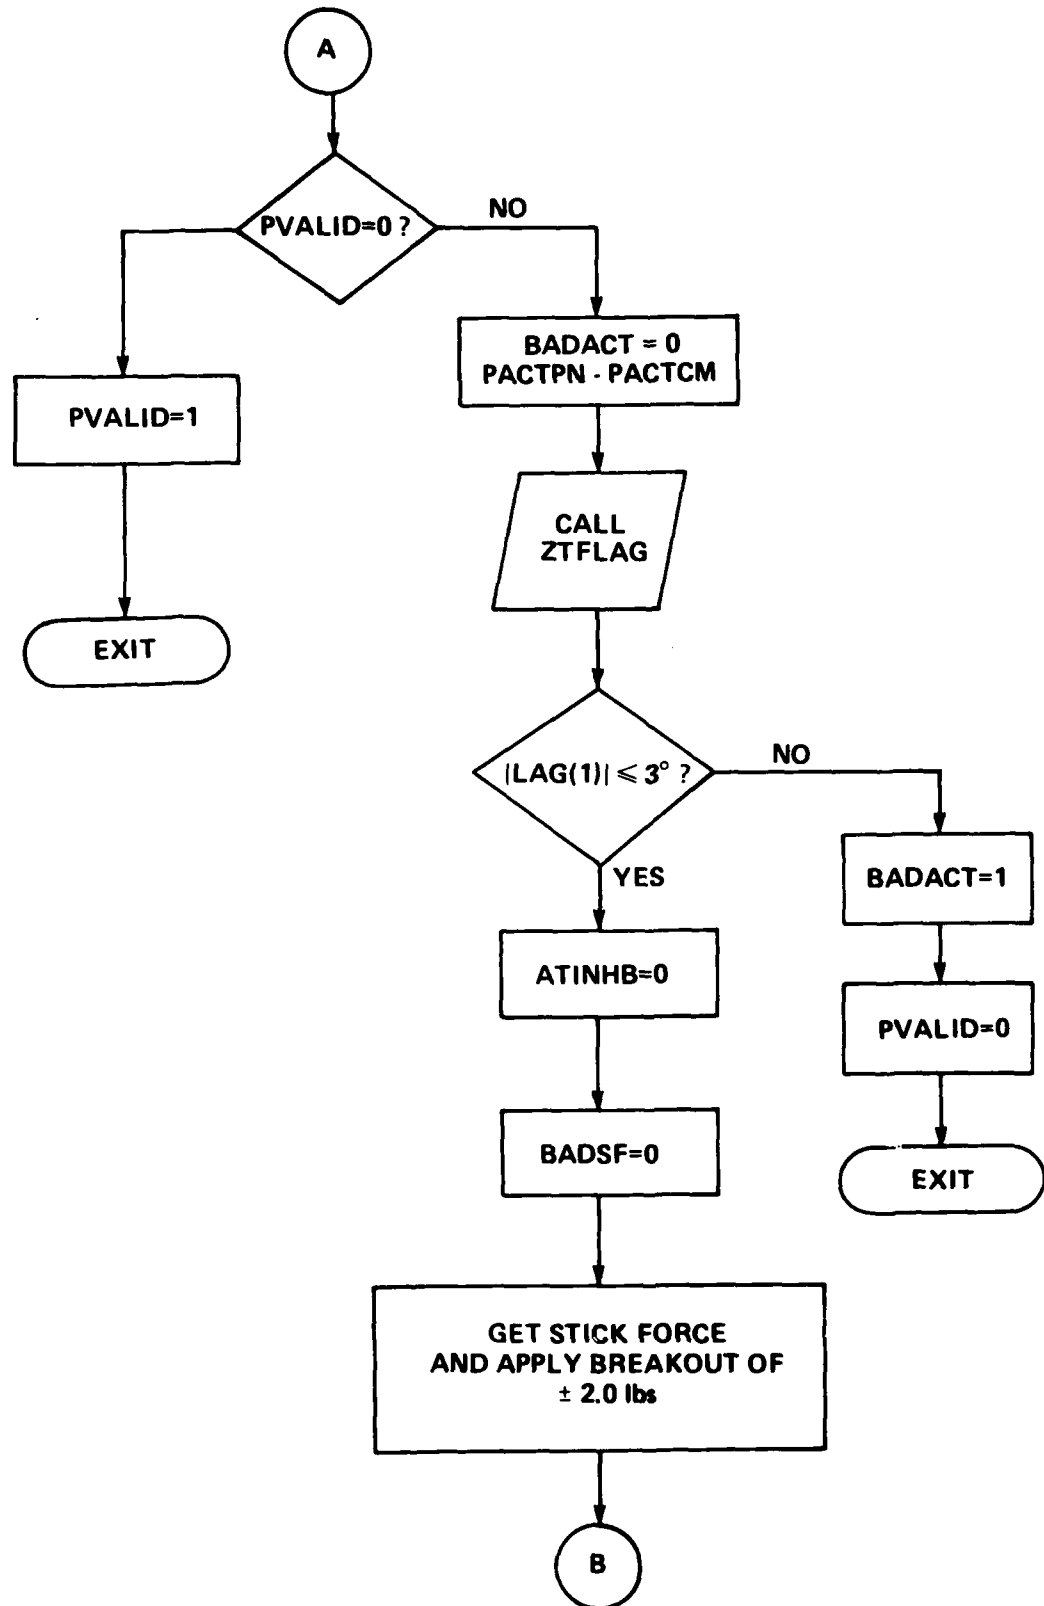
FIG. 4: SYSTEM PROGRAM FLOW CHART

FIG. 5a: PITCH SAS FLOW CHART 1

FIG. 5b: PITCH SAS FLOW CHART 2

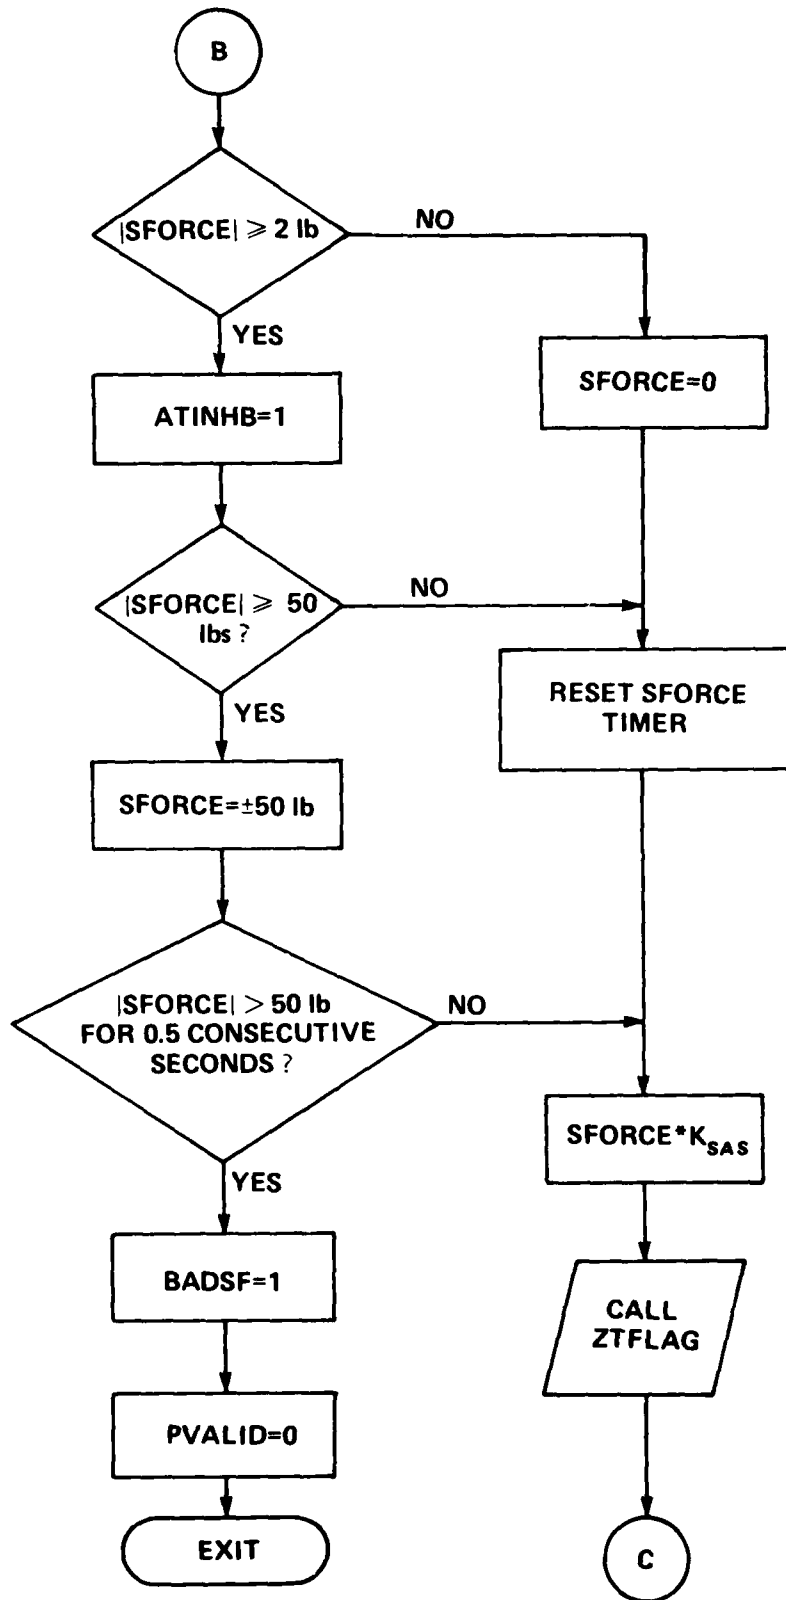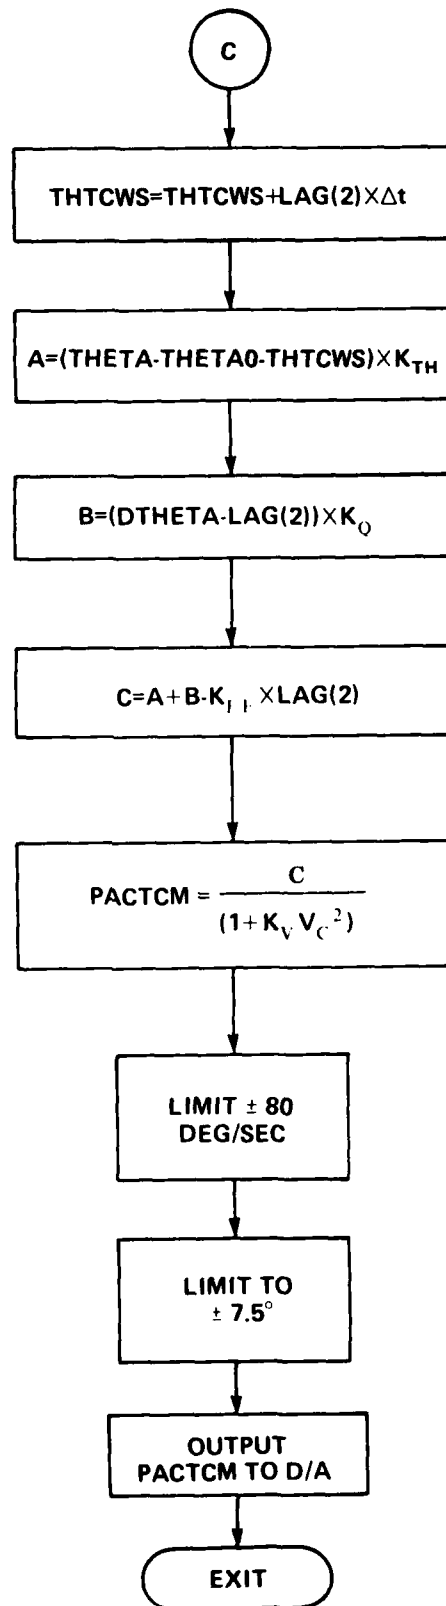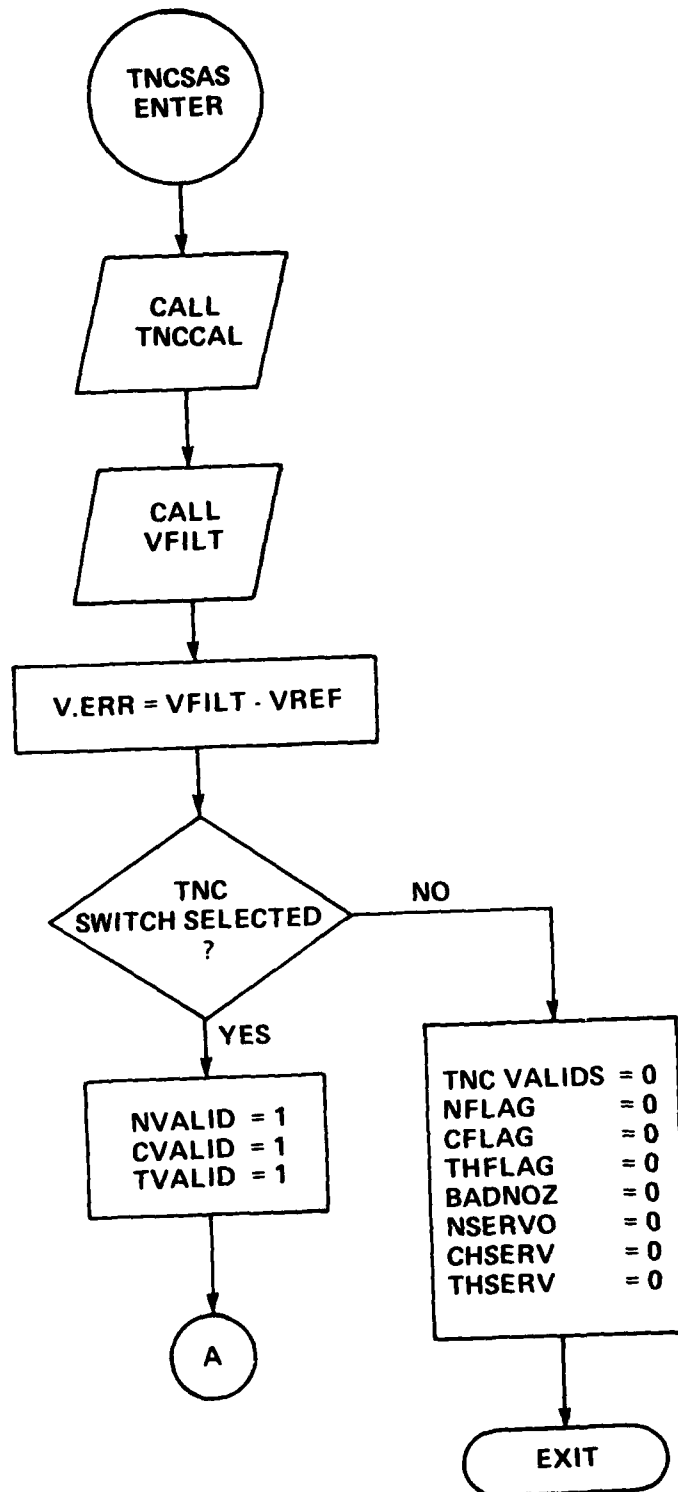FIG. 5c: PITCH SAS FLOW CHART 3

C

$$THTCWS = THTCWS + LAG(2) \times \Delta t$$

$$A = (THETA - THETA0 - THTCWS) \times K_{TH}$$

$$B = (DTHETA - LAG(2)) \times K_Q$$

$$C = A + B \cdot K_{I\,I} \times LAG(2)$$

$$PACTCM = \frac{C}{(1 + K_V V_C{}^2)}$$

LIMIT ± 80
DEG/SEC

LIMIT TO
± 7.5°

OUTPUT
PACTCM TO D/A

EXIT

FIG. 5d: PITCH SAS FLOW CHART 4

FIG. 6a: TNCSAS FLOW CHART 1

FIG. 6b: TNCSAS FLOW CHART 2
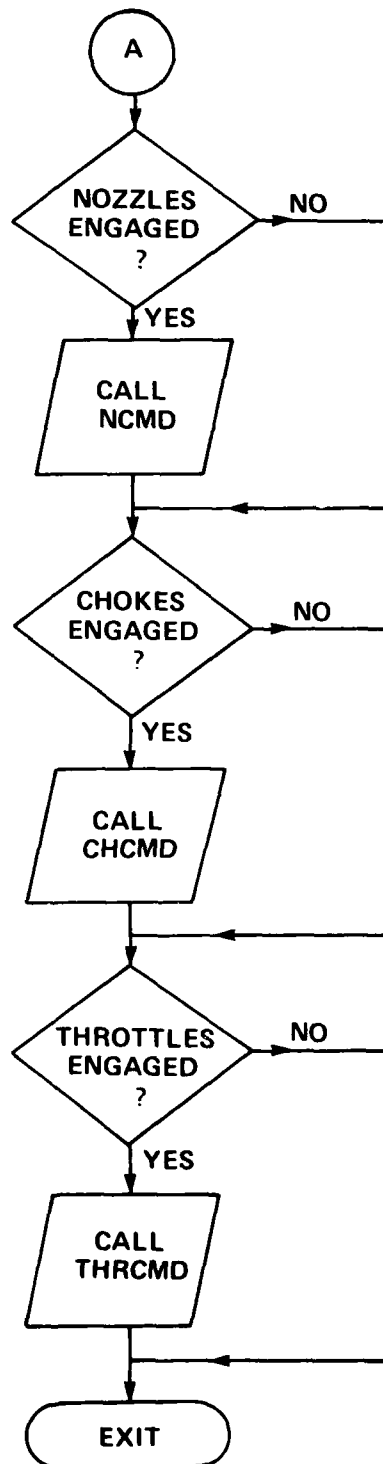
NCMD
ENTER

NFLAG

=0

=1

NURTEO = NURATE
NUFILT = NURAW
NUREF   = NURAW
THTA0   = THETA
FILTERS = 0
NFLAG   = 1

CALL
COMFIL

$|NOZ.R-NOZ.L|$
$> 25°$
?

NO

YES

NVALID = 0
NFAULT = 1

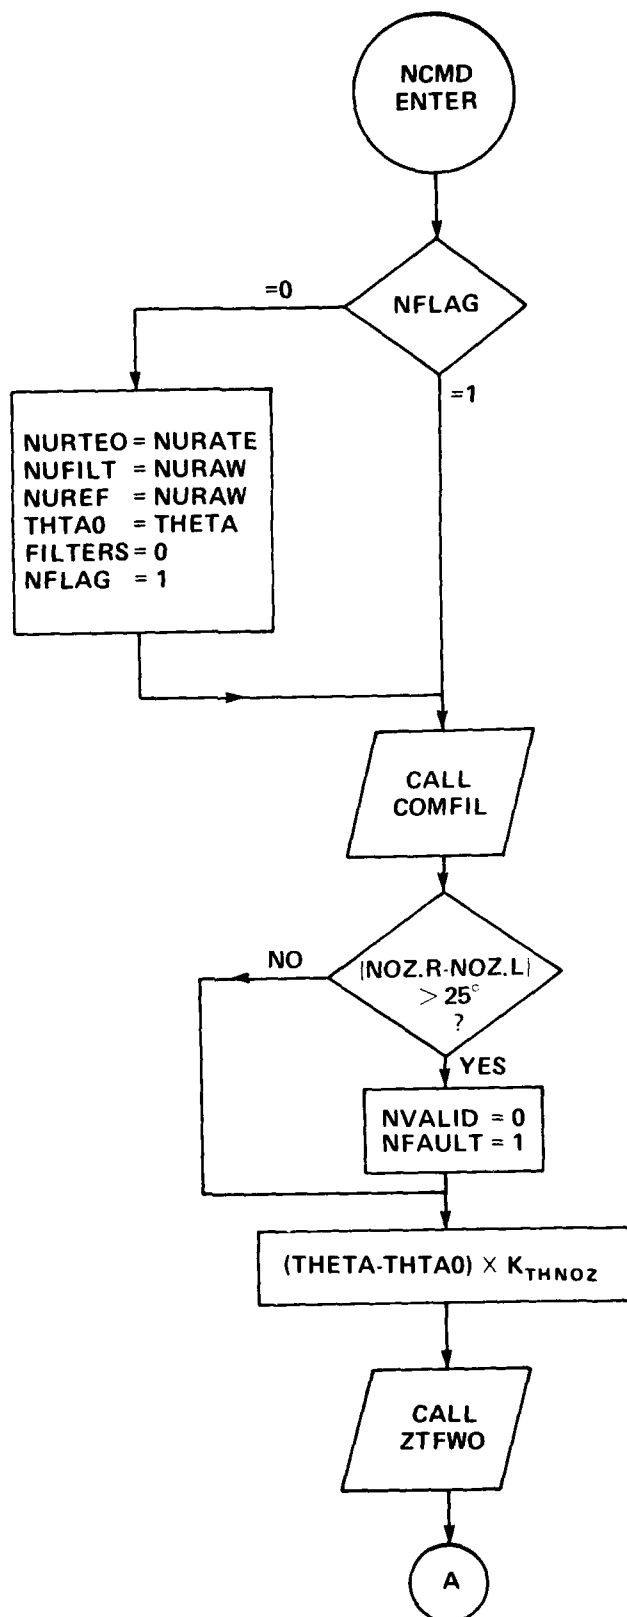$(THETA-THTA0) \times K_{THNOZ}$

CALL
ZTFWO
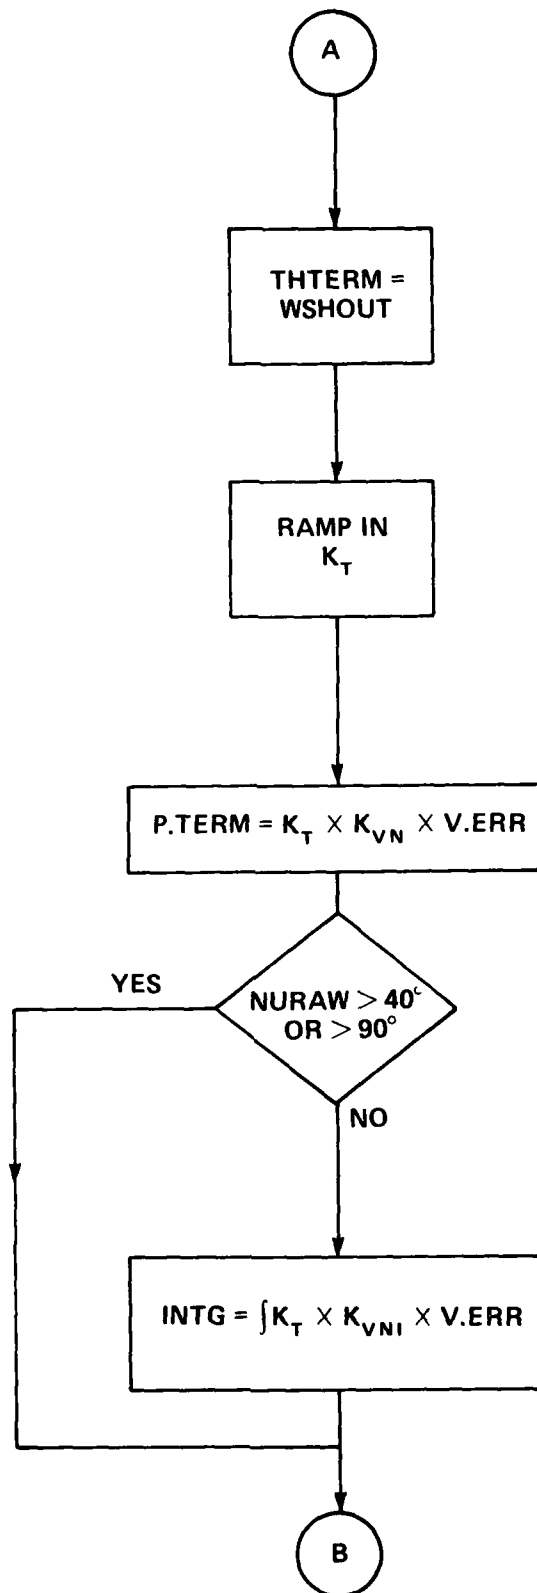
A

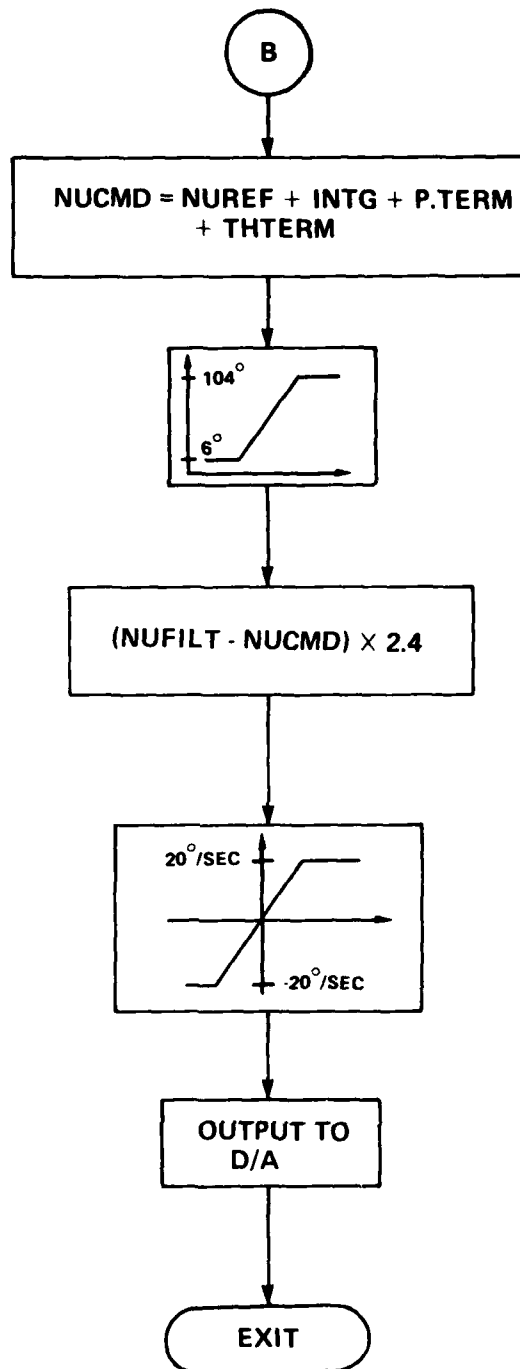FIG. 7a: NOZZLE CONTROL FLOW CHART 1

FIG. 7b: NOZZLE CONTROL FLOW CHART 2

FIG. 7c: NOZZLE CONTROL FLOW CHART 3

FIG. 8a: CHOKE CONTROL FLOW CHART 1
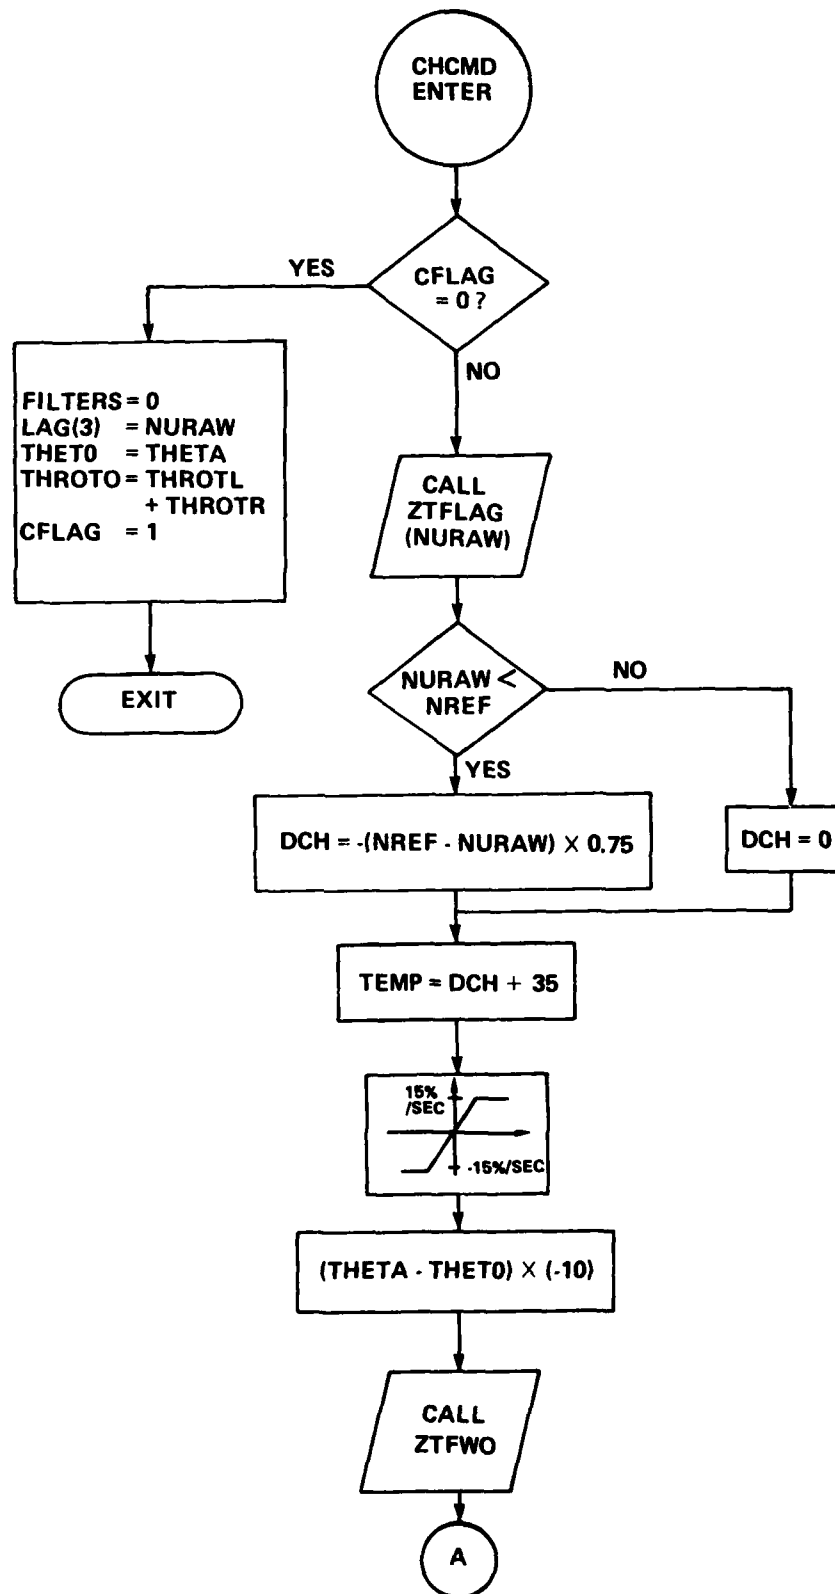
A

CHTEMP = TEMP + WSOUTI

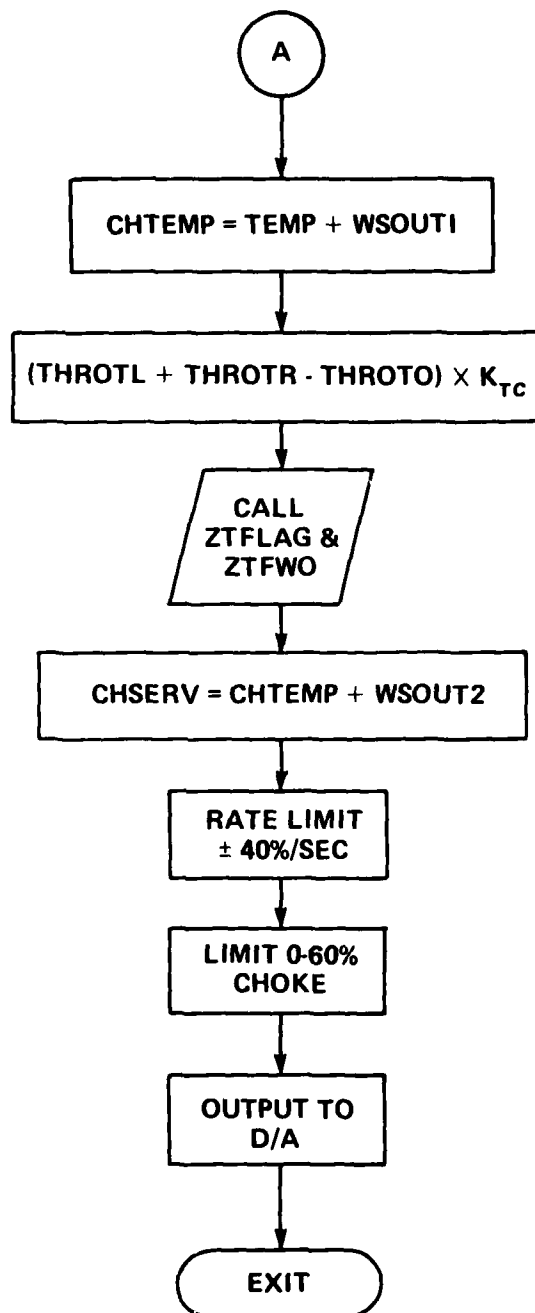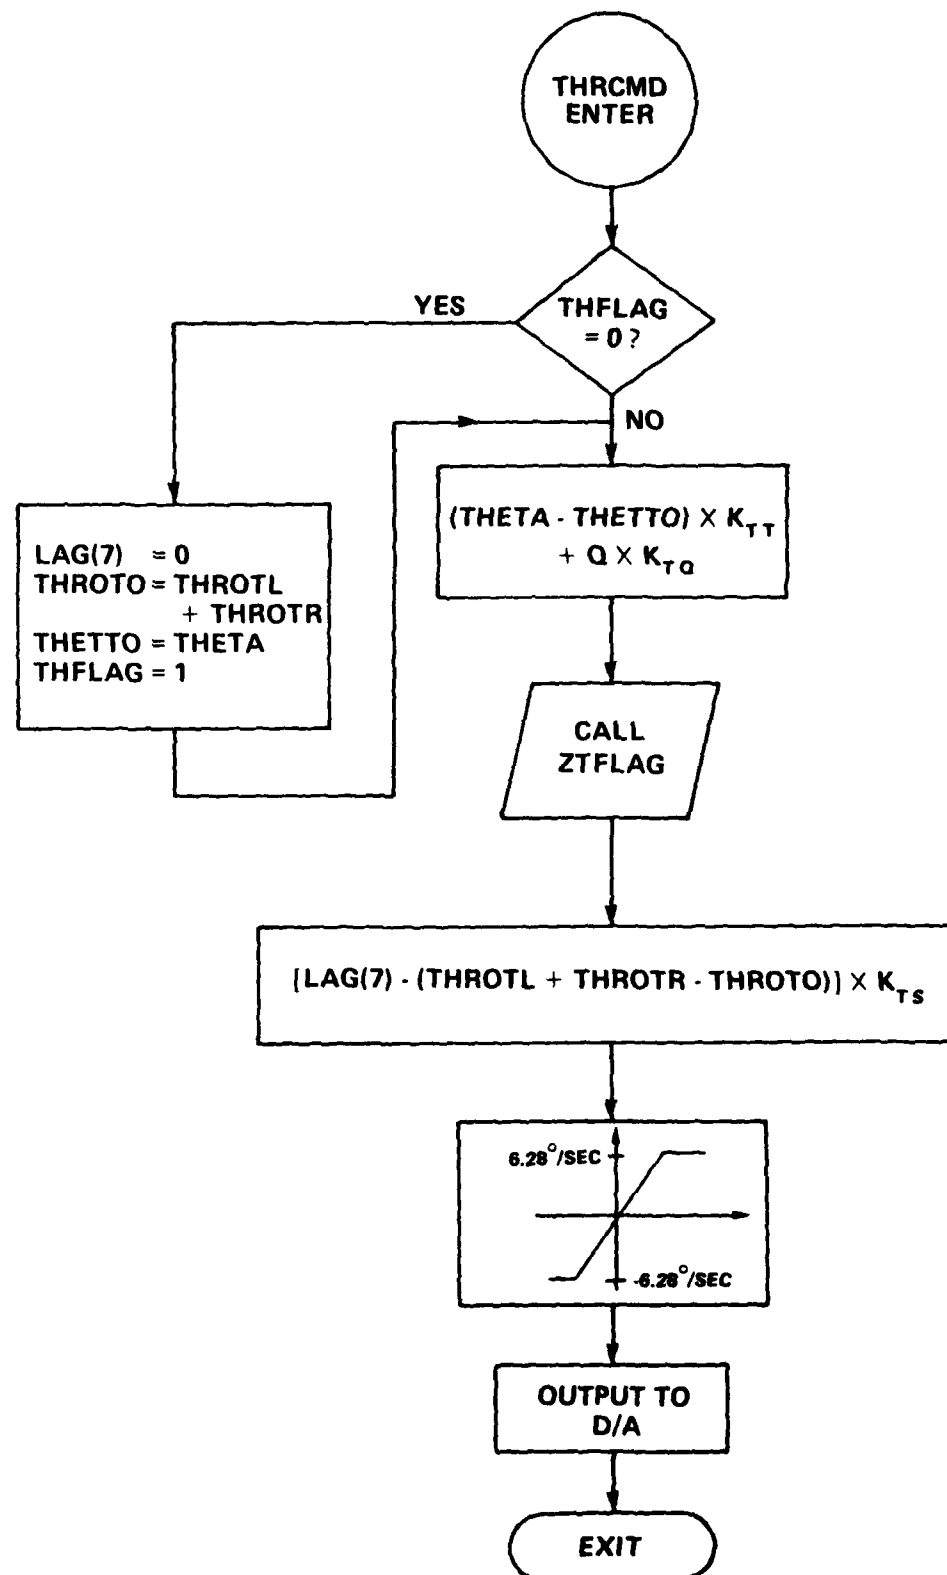$(THROTL + THROTR - THROTO) \times K_{TC}$

CALL
ZTFLAG &
ZTFWO

CHSERV = CHTEMP + WSOUT2

RATE LIMIT
± 40%/SEC

LIMIT 0-60%
CHOKE

OUTPUT TO
D/A

EXIT

FIG. 8b: CHOKE CONTROL FLOW CHART 2

FIG. 9: THROTTLE CONTROL FLOW CHART

FAN AIR
CROSS DUCT
(TO OUTER DUCT)

VECTORABLE SWIVELING
CONICAL NOZZLES

¢ NACELLE

AUGMENTOR DUCT AND FLAP

OUTER UPPER
DUCT NOZZLE

WING
CHORD PLANE

INNER
DUCT LOWER
NOZZLE

CHOKE

FAN AIR
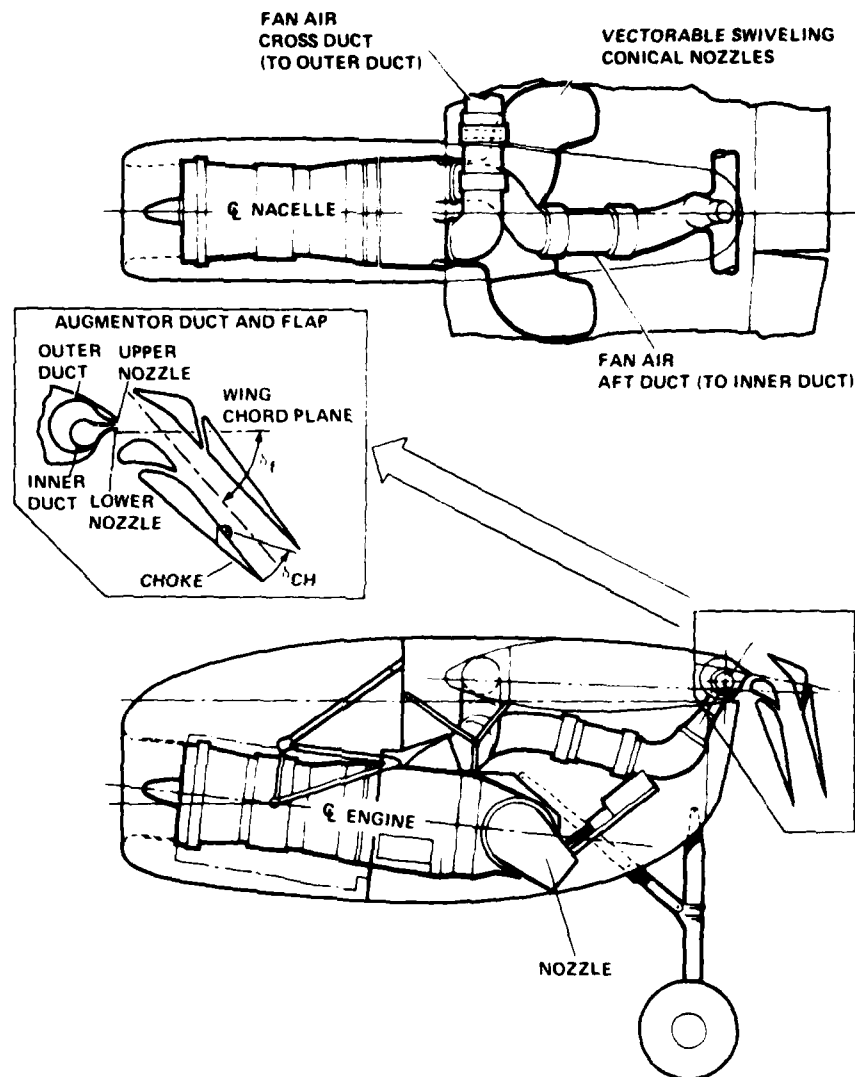AFT DUCT (TO INNER DUCT)

¢ ENGINE

NOZZLE

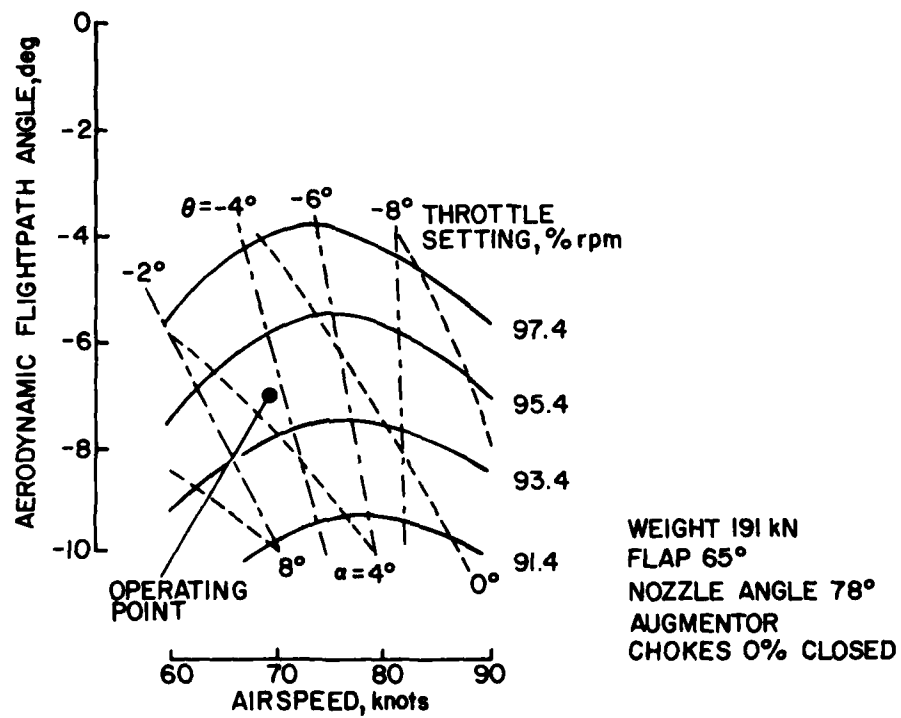**FIGURE 10: AUGMENTOR JET FLAP AND PROPULSION SYSTEM**

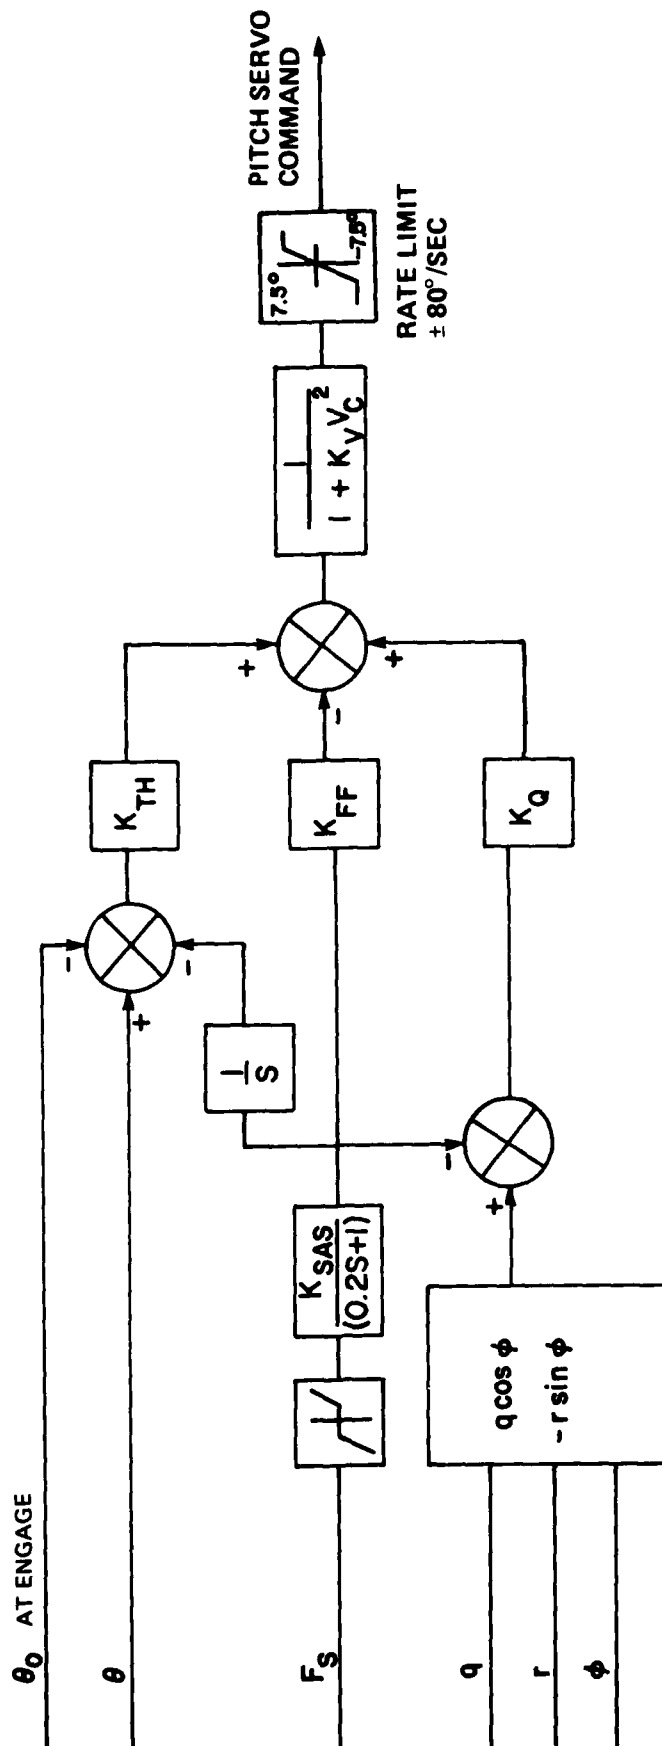FIG. 11: DESCENT TRIM CONDITIONS, NOZZLES FIXED

FIG. 12: PITCH SAS

FIG. 13: NOZZLE CONTROL
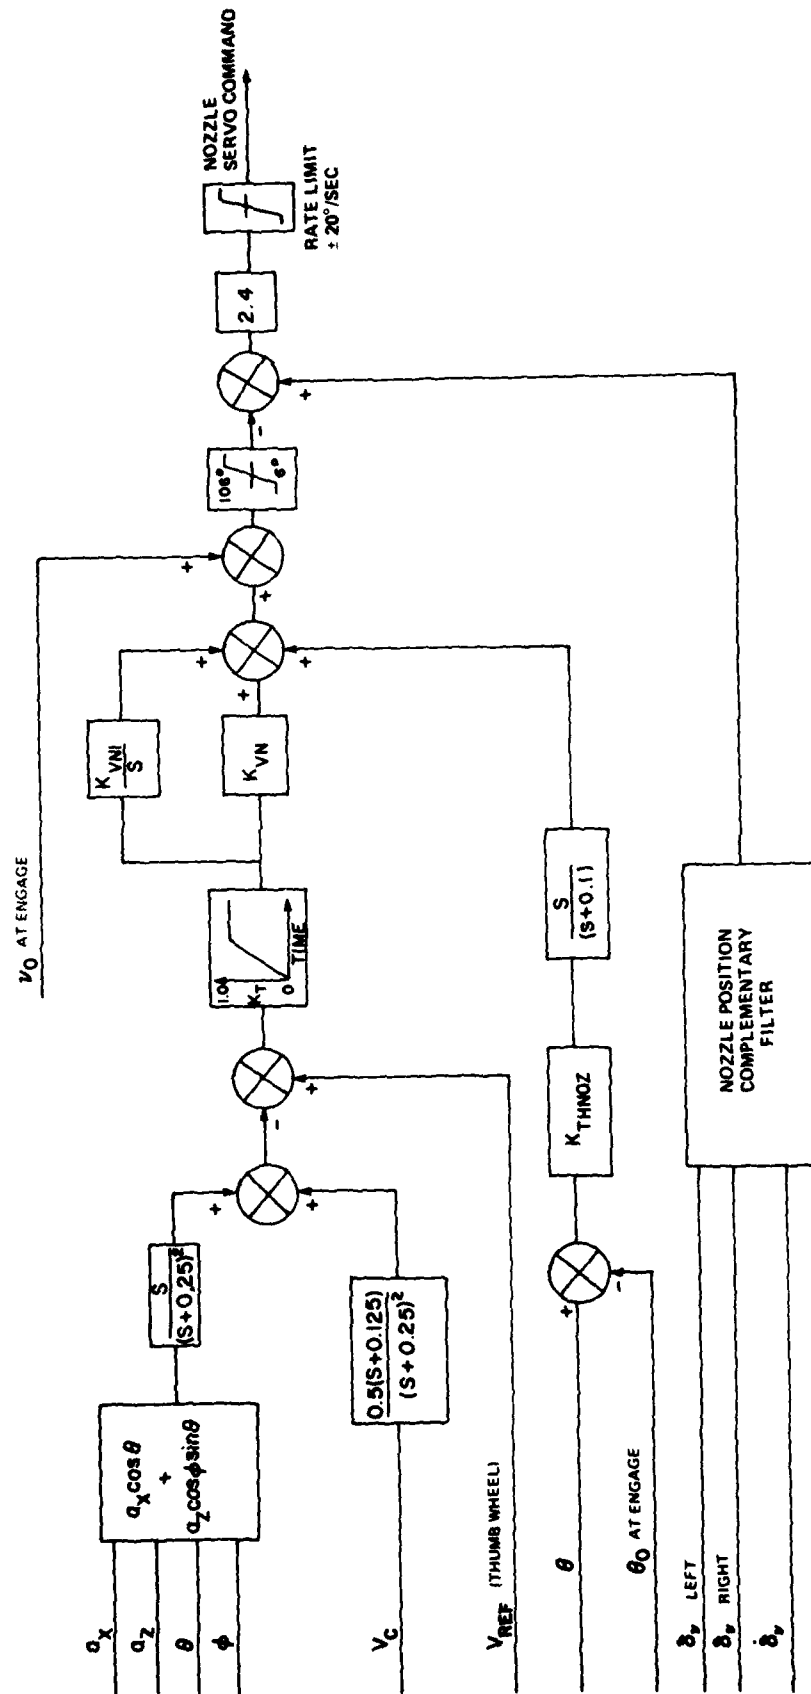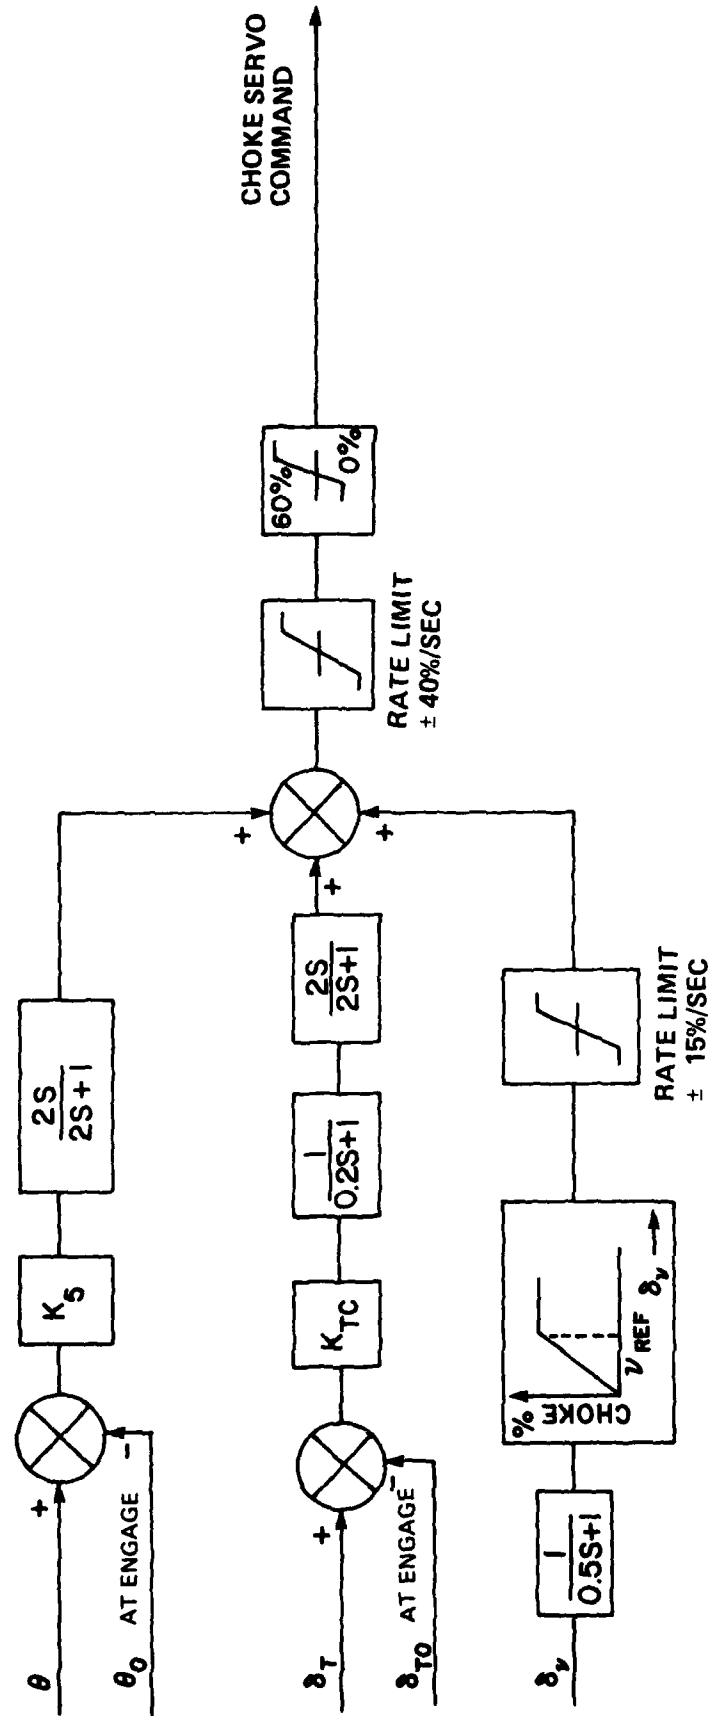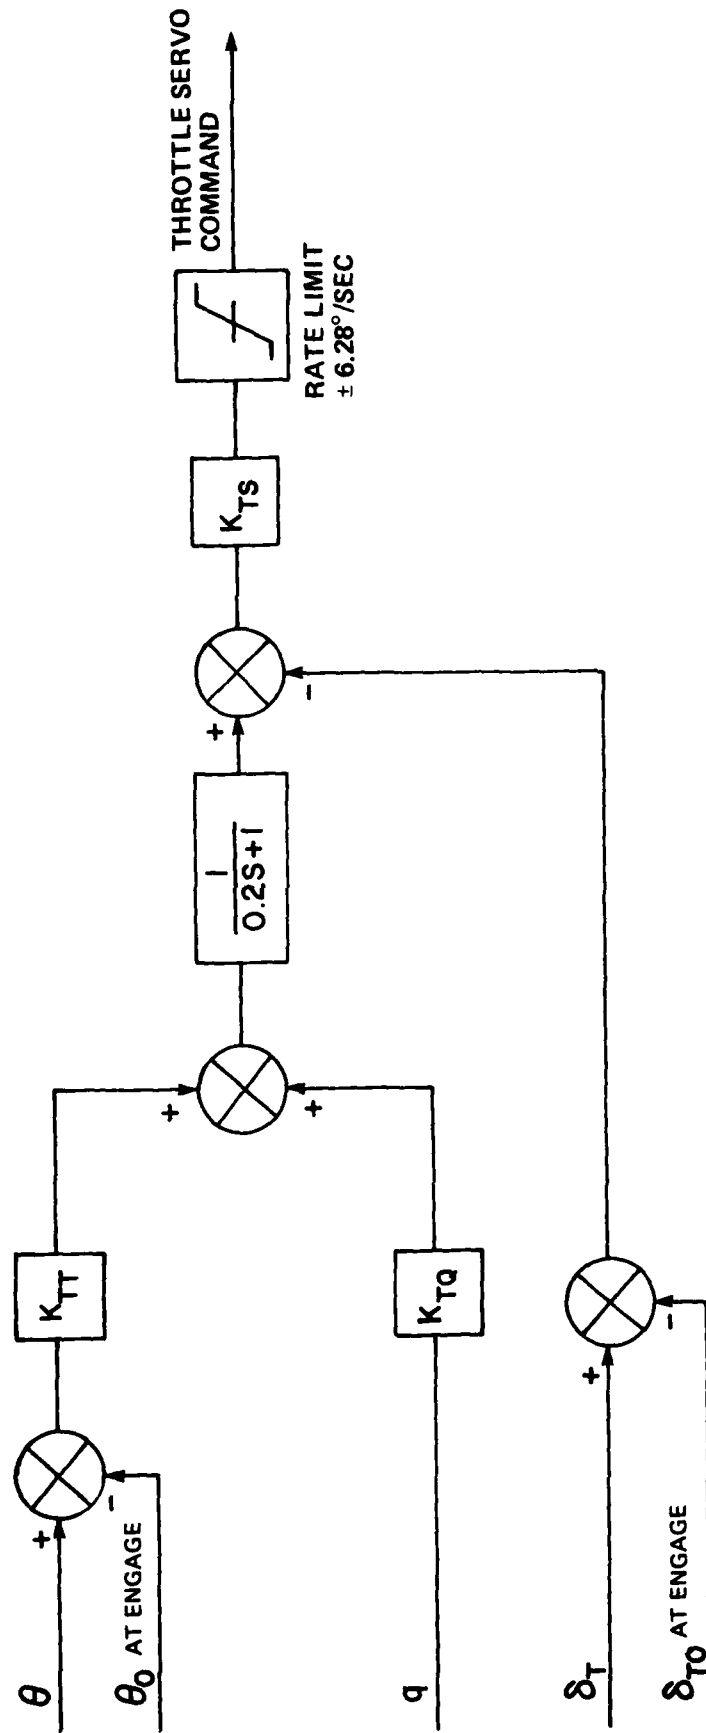
FIG. 14: CHOKE CONTROL

FIG. 15: THROTTLE CONTROL

APPENDIX A

MNEMONICS	DESCRIPTION
ATINHB	auto-trim follow-up inhibit
ATOD	A/D input subroutine
a_x	longitudinal acceleration
a_z	normal acceleration
BADACT	'bad actuator' software flag
BADGYR	'bad gyro' software flag
BADNOZ	'bad nozzle' software flag
BADSF	'bad stick force' software flag
CFLAG	initialization flag for choke control law
CHCMD	choke control law subroutine
CHSERV	choke command to servo loop
CHTEMP	temporary location for CHSERVO
COMFIL	nozzle position filter subroutine
CVALID	nozzle servo enable
DCH	per cent choke closed
DTHETA	pitch angle rate
FILTERS	low pass and high pass filters
F_s	stick force input
INTG	program label for speed error integration
K_{FF}	pitch feed forward gain
K_Q	gain on pitch rate error
K_{SAS}	stock force to pitch rate command gain
K_{TC}	cross feed gain on throttle to choke
K_{TH}	gain on pitch angle error
K_{THNOZ}	cross feed gain on pitch angle to nozzle
K_{TQ}	cross feed gain on pitch rate to throttle

MNEMONICS	DESCRIPTION
K_{TS}	throttle servo loop gain
K_{TT}	cross feed gain on pitch angle to throttle
K_V	gain on speed squared scheduling
K_{VN}	speed error gain
K_{VNI}	integral speed error gain
K_5	cross feed gain on pitch angle to choke
LAG	output of low pass filter
NCMD	nozzle control law subroutine
NFAULT	flag indicating nozzle asymmetry
NFLAG	initialization flag for the nozzle control law
NOZ.L	left nozzle position
NOZ.R	right nozzle position
NREF	nozzle reference position selected on thumbwheel switches
NSERVO	nozzle command to servo loop
NUCMD	calculated nozzle command
NUFILT	calculated filtered nozzle angle
NURATE	nozzle rate
NURAW	raw nozzle angle
NUREF	nozzle angle at engagement
NURTEO	nozzle rate at engagement
NVALID	nozzle servo enable
PACTCM	pitch SAS actuator command
PACTPN	pitch actuator position
PHI	roll angle
PSAS	pitch SAS subroutine
PTERM	program label for speed error calculation
PVALID	pitch servo enable

MNEMONICS	DESCRIPTION
Q or q	pitch rate
r	yaw rate
SFORCE	pilot's stick force
TEMP	temporary storage location
THETA	pitch angle
THETAO	pitch angle at pitch servo engagement
THETO	pitch angle at choke servo engagement
THETTO	pitch angle at throttle servo engagement
THFLAG	throttle loop initialization flag
THPAST	value of pitch angle on previous cycle
THRCMD	throttle control law subroutine
THROTL	left throttle position
THROTR	right throttle position
THROTO	throttle position at engagement
THSERV	throttle command to servo loop
THTERM	theta to nozzle crossfeed term
THTAO	pitch angle at nozzle servo engagement
THTCWS	pilot's conditioned pitch rate command
TNC	throttle, nozzle and choke
TNCCAL	subroutine to scale inputs for throttle, nozzle and choke loops
TNCSAS	throttle, nozzle and choke executive subroutine
TVALID	throttle servo enable
V_c	calibrated airspeed
VFILT	output of the airspeed complementary filter
VREF	airspeed set by pilot on thumbwheel
VERR	error signal between filtered and selected airspeed
WSHOUT	output of high pass filter

MNEMONICS	DESCRIPTION
WSOUT1	output of first high pass filter
WSOUT2	output of second high pass filter
ZTFLAG	low pass filter
ZTFWO	high pass filter
θ	pitch angle
ϕ	bank angle
δ_v	nozzle position
δ_T	throttle position

REPORT DOCUMENTATION PAGE / PAGE DE DOCUMENTATION DE RAPPORT

REPORT/RAPPORT		REPORT/RAPPORT	
NAE-AN-5		NRC No. 21066	
1a		1b	

REPORT SECURITY CLASSIFICATION CLASSIFICATION DE SÉCURITÉ DE RAPPORT	DISTRIBUTION (LIMITATIONS)
Unclassified	Unlimited
2	3

TITLE/SUBTITLE/TITRE/SOUS-TITRE

Development of the MICROSAS Longitudinal Flight Control System for the Augmentor Wing Aircraft

4

AUTHOR(S)/AUTEUR(S)

S. Kereliuk, K. Lum, W.E.B. Roderick

5

SERIES/SÉRIE

Aeronautical Note

6

CORPORATE AUTHOR/PERFORMING AGENCY/AUTEUR D'ENTREPRISE/AGENCE D'EXÉCUTION

National Research Council Canada
National Aeronautical Establishment   Flight Research Laboratory

7

SPONSORING AGENCY/AGENCE DE SUBVENTION

8

DATE	FILE/DOSSIER	LAB. ORDER COMMANDE DU LAB.	PAGES	FIGS/DIAGRAMMES
83-02			18	15
9	10	11	12a	12b

NOTES

13

DESCRIPTORS (KEY WORDS)/MOTS-CLÉS

1. Aircraft — Control Systems

14

SUMMARY/SOMMAIRE

A digital longitudinal stability augmentation system was designed and installed in the Augmentor Wing Research Aircraft by the Flight Research Laboratory of the National Aeronautical Establishment. This system partially replaced the computer-controlled control and display system called STOLAND owned by NASA Ames Research Center that was removed from the aircraft prior to its return to Canada. The computer system is described and the software flow charts are illustrated. Brief comments on the performance of the system during the flight test program are included.

15